





## Montaj / Assembling

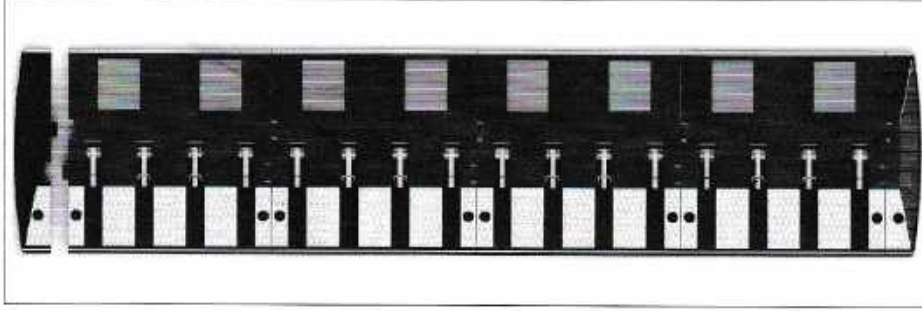

Ürün Montaj Resmi  
Product Assembling Picture

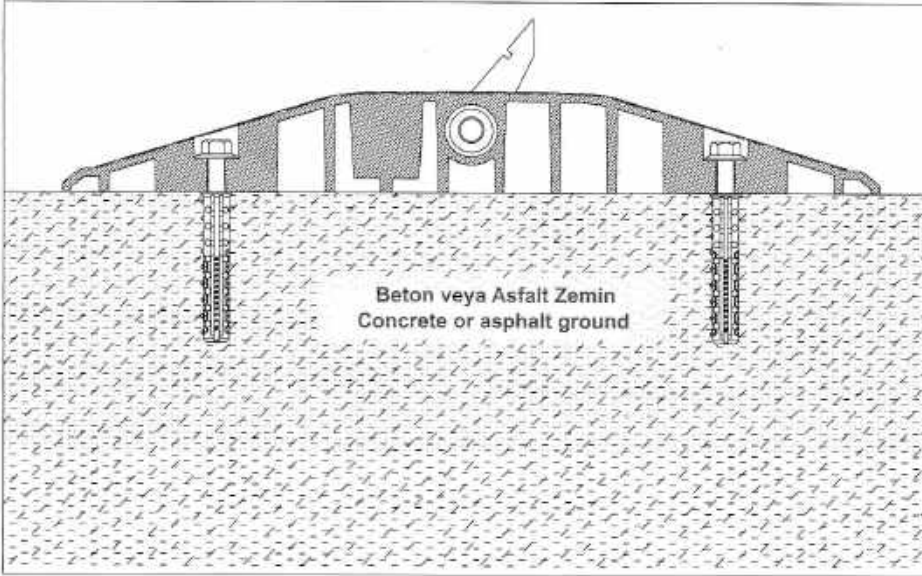

Montaj Uygulama Resmi  
Installation Picture

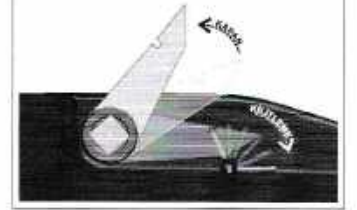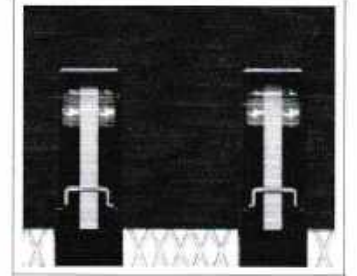

Kapan Kilitleme Kesiti  
Trap Lock Section



Montaj Trifon Vidası ve Özel Dübeli  
Installation part hex.head screw and  
special designed anchor

## Otopark Kasis Kapan Uygulaması

1. Kapan Uygulaması Kendi Montaj Elemanlarıyla Montaj Edilmelidir.
2. Montaj Edilecek Zemin Düz, Beton veya Asfalt Olmalıdır.
3. Montaj Yapıldıktan Sonra Kilitleme Telini Yataktan Çıkartın Ürün Aktif Hale Gelecektir.
4. Özel Hallerde Kilitleme Telini Takarak Tersten Geçme Sağlanır.
5. Ürün Kullanım Süresince Sistemi Yağlama İhtiyacı Gerektirmez.

## Installation for Trap

1. Installation should be completed by using its own installation parts.
2. Ground should be smooth straight; concrete or asphalt.
3. After installation, take trap locking wire off from bed, and the item will be activated.
4. By the lock wire, opposite direction is available in case of unusual situations.
5. No need to lubricate the system during the service.